



UWAGI
 Beton klasy B20
 Stal: zbrojenie główne A-III, strzemiona A-I

WN - wieniec nadproże 24x24cm,
nadproża zbroić jak wieniec + dodatkowo 1 pręt dołem
strzemiona Ø6 A-I co 12cm

<h1>RZUT WIĘNCÓW NAD PARTEREM</h1>		Skala: 1:50
		BRANŻA: ARCH.KONSTR.
OBIEKT	BUDYNEK GOSPODARCZO - GARAŻOWY	
ADRES BUDOWY	Dz. nr 231/6-LP obręb Kęsowo [0003], jednostka ewidenc. Kęsowo-G [041603_2]	
INWESTOR	Nadleśnictwo Zamrzenica Zamrzenica 1A, 89-510 Byślów	
PROJEKTANT -specjalność architektoniczna	mgr inż.arch. Jan Sabiniarz upr. nr 558/75/Bg	Podpis
		Data:2019.11.12
ASYSTENT projektanta	inż. Karol Sabiniarz	Podpis
		Data:2019.11.12
ARCHIDEO Karol Sabiniarz Powąki ul. Świerkowa 2, 89-620 Choinice		NR RYS. K2

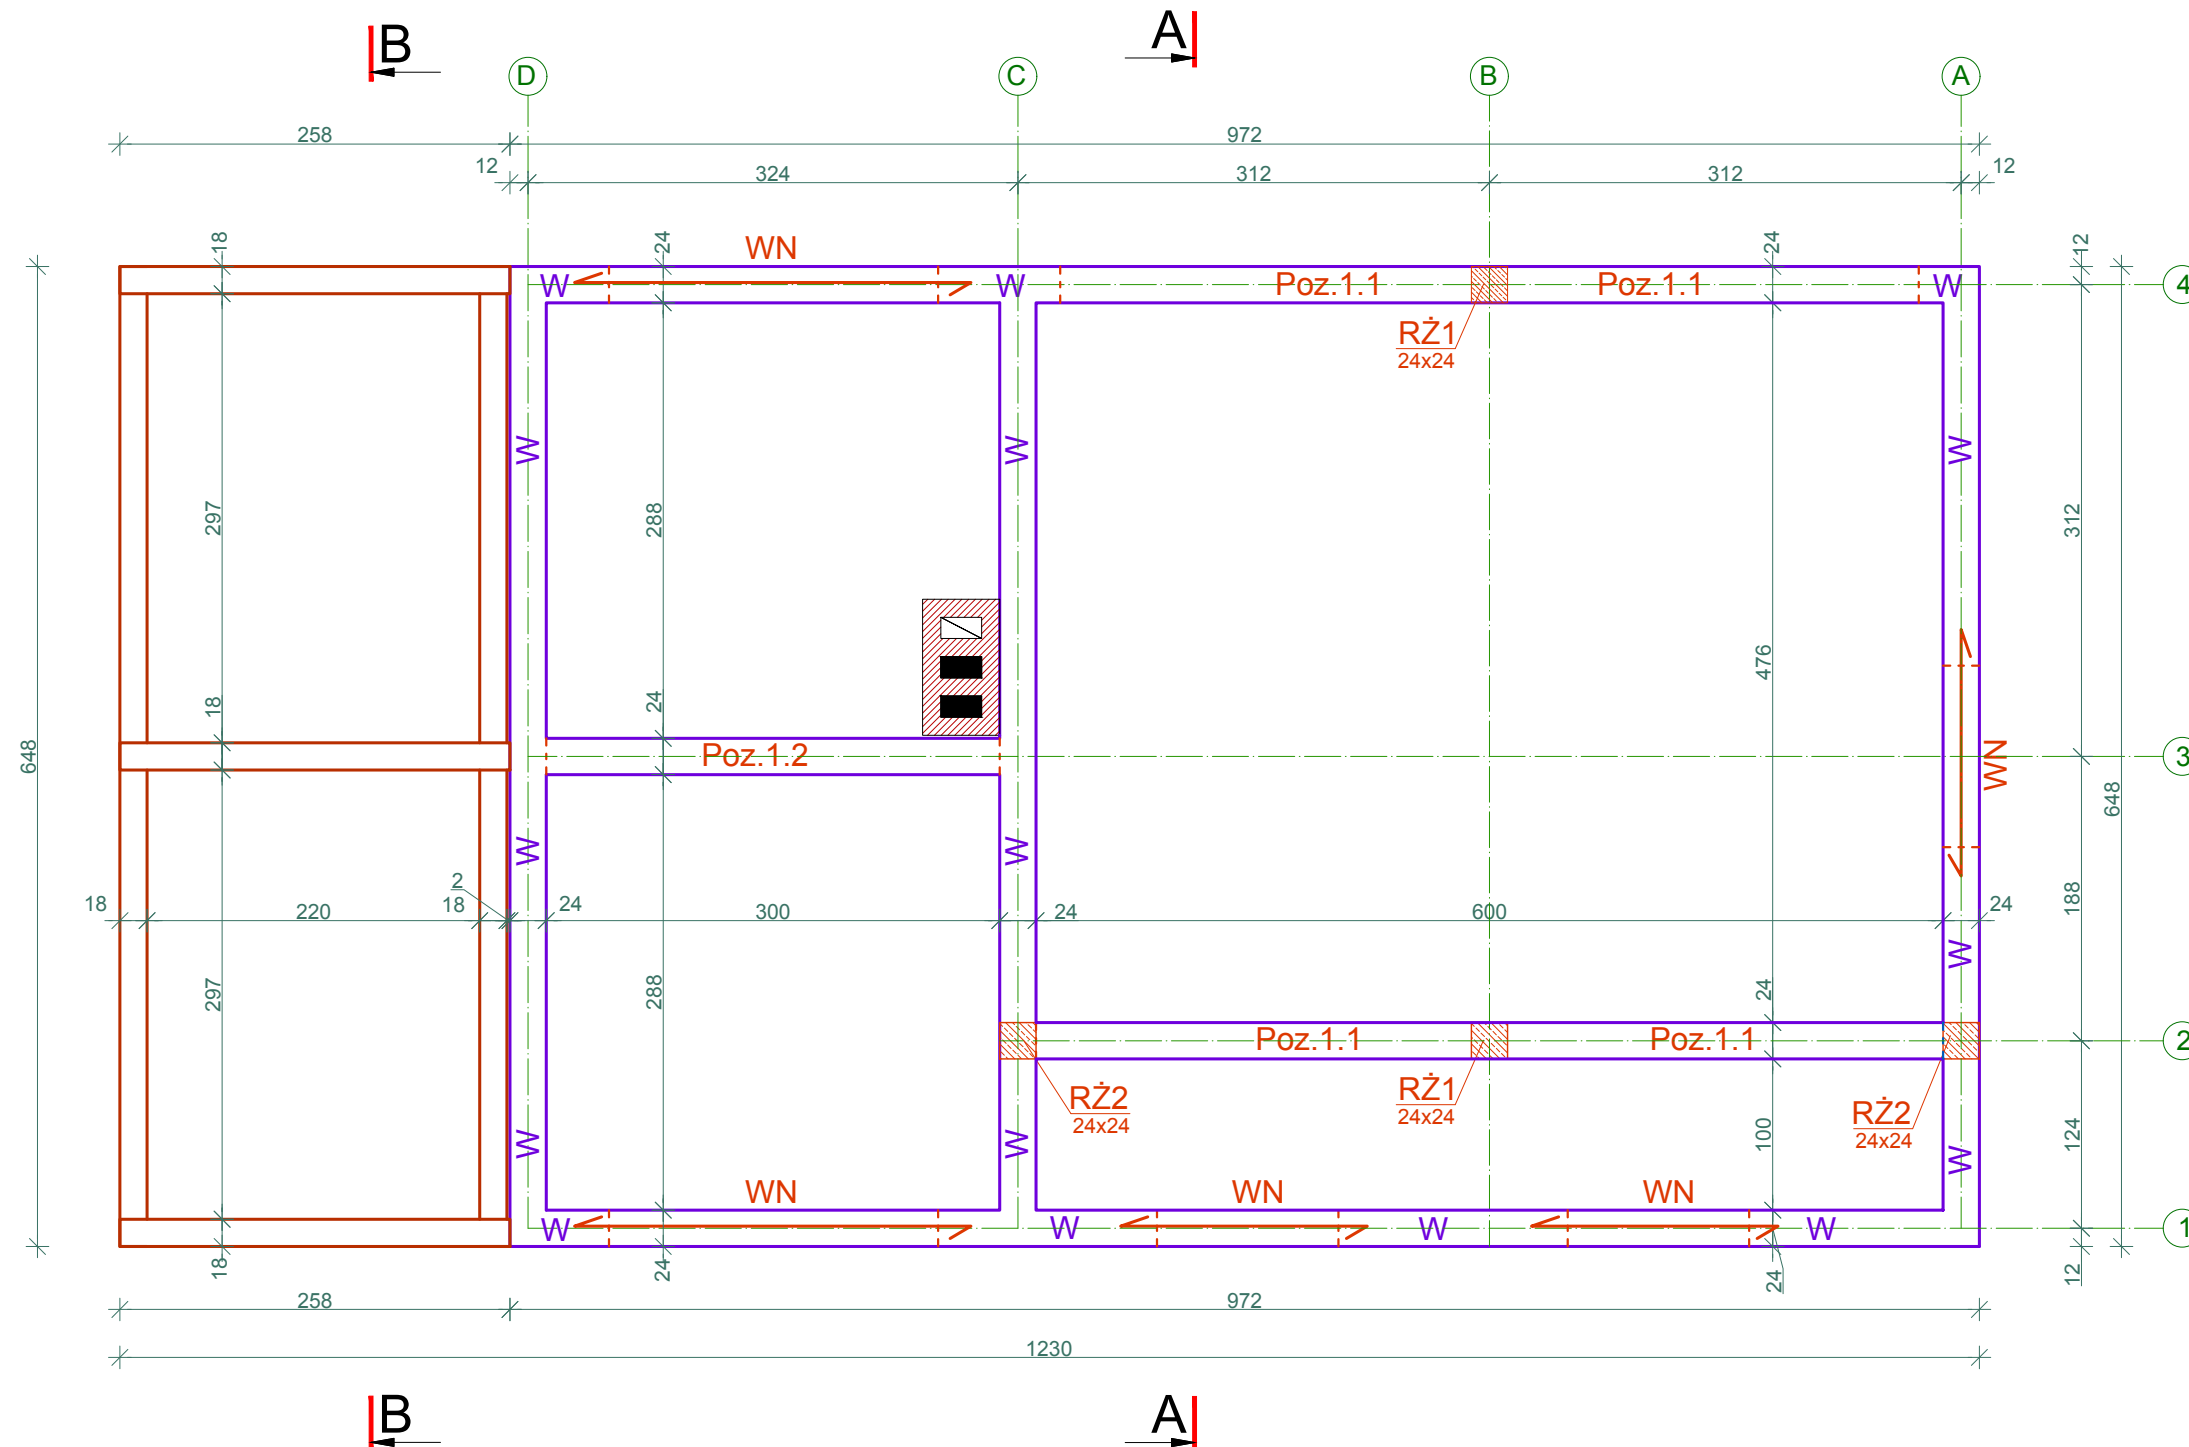

RŻ2 - Rdzeń żelbetowy o przekroju 24x24 cm, zbrojenie podłużnie **4Ø12 A-III**, wg rys. konstrukcji, beton B-20



Technical drawing of a square plate. The outer square is labeled "Nr 6 #12" at the top-left and bottom-left corners. The inner square is labeled "Nr 7 Ø6" at the top-right corner. The side length of the outer square is indicated as 24 on both the left and bottom edges. The distance from the outer edge to the inner edge is indicated as +2,36 on the top edge.