



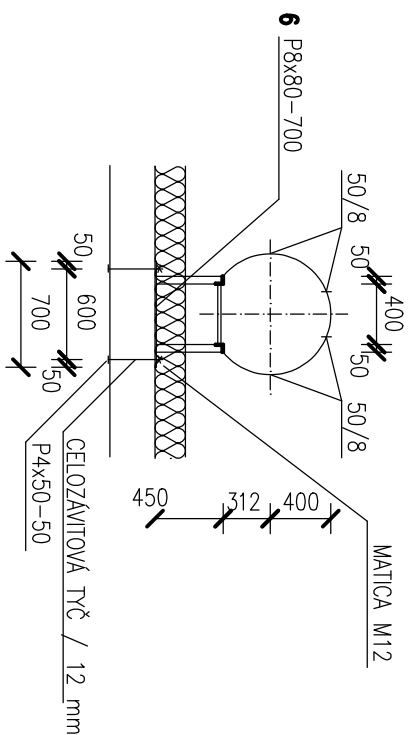



OCELOVÝ POŽIARNÝ REBRÍK 4/Z

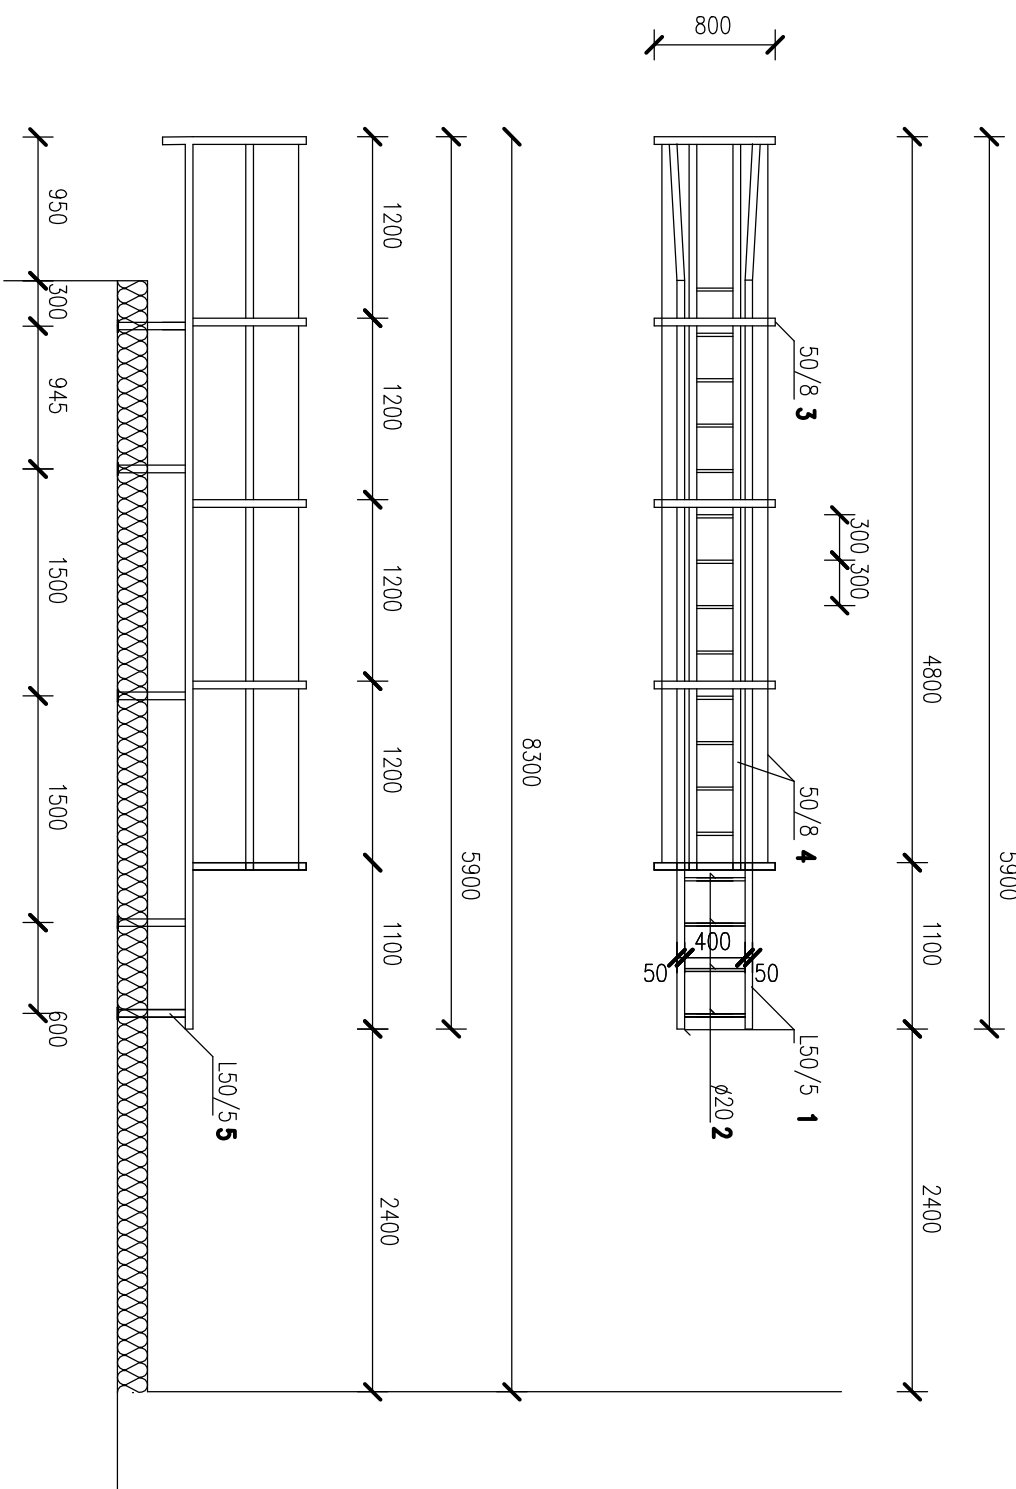

OZNAC.	POL.	PRIEREZ	KS	DLŽKA		HMOTNOST'	
				1KS/m	CELKOM	1kg/mb	CELKOM
	1	L 50/5	2	5,900	11,800	3,770	44,486
	2	ø20	17	0,400	6,800	2,470	16,796
	3	PL 50/8	5	2,000	10,000	3,140	31,400
	4	PL 50/8	4	4,800	19,200	3,140	60,288
	5	L 50/5	10	0,450	4,500	3,770	16,965
	6	PL 80/8	5	0,700	3,500	5,020	17,570
STRATNÉ 5%				9,375			
HMOTNOST' SPOLU				196,880			

POZNÁMKA

- OCELOVÉ KONŠTRUKCIE NÁTEROM ZÁKLADNÝM + 2x OLEJOVÝM VRCHNÝM
- PLATNÉ KOTVIČ KOTVAMI D=10, DL. 120 mm d 4ks

<p align="center">DRUPROJEKT</p> <p align="center">Inžiniersko – projektové združenie</p> <p align="center">Okružná 33, 080 01 Prešov</p>			
Zodp. projektant	Vypracoval	Kresil	Kontroloval
ING. NOVOTNÝ	ING. NOVOTNÝ	ING. NOVOTNÝ	ING. MERGEŠ
			
Okres	KEŽMAROK	Ocú	IHLANY
Investor	OBEC IHLANY		
Stavba			
<p align="center">ROZŠÍRENIE KAPACITY MATERSKEJ ŠKOLY</p> <p align="center">V OBCI IHLANY</p> <p>Názov a číslo objektu 01 – MATERSKÁ ŠKOLA</p>			
Obsah	<p>POŽIARNY REBRÍK 4/Z</p>		
Mierka :	Č. výkr.:		
1 : 50	18		