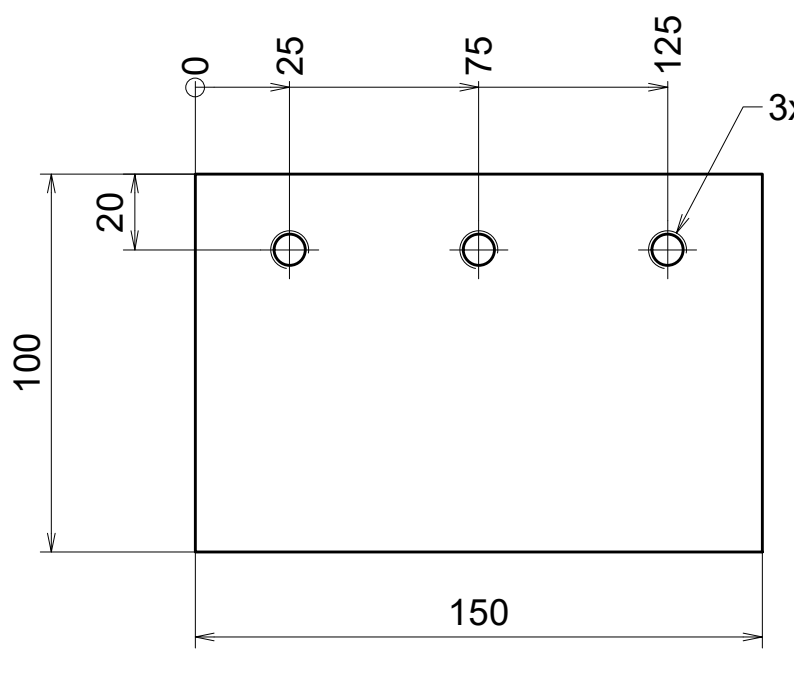
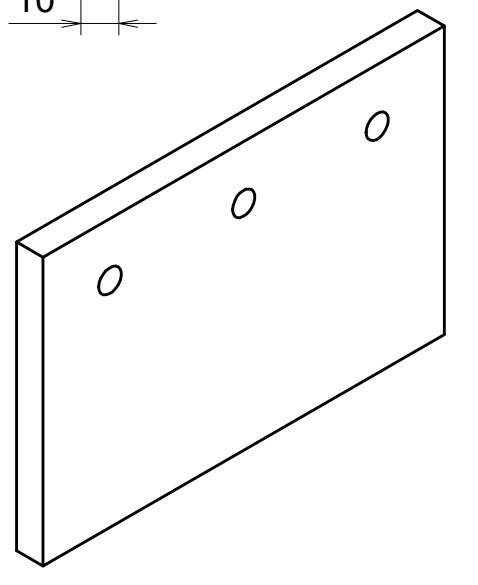




1		2		3		4	
Netolerované rozměry délek ISO 2768-mK		Netolerované rozměry úhlů ISO 2768-mK		Ra 6,3 ✓ (✓)			
Rozsah [mm]	Úchylky [mm]	Délka odvěsny [mm]	Úchylky [°]				
od 2000 do 4000	±2	přes 400	±0°5'				
od 1000 do 2000	±1,2	od 120 do 400	±0°10'				
od 400 do 1000	±0,8	od 50 do 120	±0°20'				
od 120 do 400	±0,5	od 10 do 50	±0°30'				
od 30 do 120	±0,3	do 10	±1°				
od 6 do 30	±0,2						
od 0,5 do 6	±0,1						
							
							
TOLERANCE ROZTEČE ZÁVITŮ ± 0,1 ODJEHLIT							
REV.		POPIS / DESCRIPTION		SCHVALIL / APPROVED		DATUM / DATE	
Materiál: Material:		1.0570 / S355J2G3		Povrchová úprava: Surface treatment:			
Hmotnost (kg): Mass (kg):		0,001		Název: Title:			
Štěpánská 34 110 00 Praha 1 www.ice.cz				ŽEBRO			
Tato technická dokumentace je duševním vlastnictvím firmy ICE Industrial Services a.s. Bez souhlasu vlastníka nesmí být kopírována, publikována ani poskytnuta třetí osobě. This technical documentation is the intellectual property of the company ICE Industrial Services a.s. Copying, publishing or disclosure to third parties without the expressed permission of the owner is forbidden.		Číslo výkresu: Drawing No.:		Revize: Revision:			
Navrhl: Designed:		Dalibor Kunc		TaO-00316		00	
Datum: Date:		20.01.2026					
Schválil: Approved:		Dalibor Kunc					
Datum: Date:		26.01.2026					
				Přesnost: Precision:		Měřítko: Scale:	
		Ra ✓		ISO 2768 - mK		1 : 2	
				Tolerance: Tolerance:		List: Sh.:	
				ISO 8015		1 / 1	
						Formát: Format:	
						A4	
1		2		3		4	