


STOŽIARE KUŽELOVÉ S PRÍRUBOU

CONICAL POLES WITH FLANGE

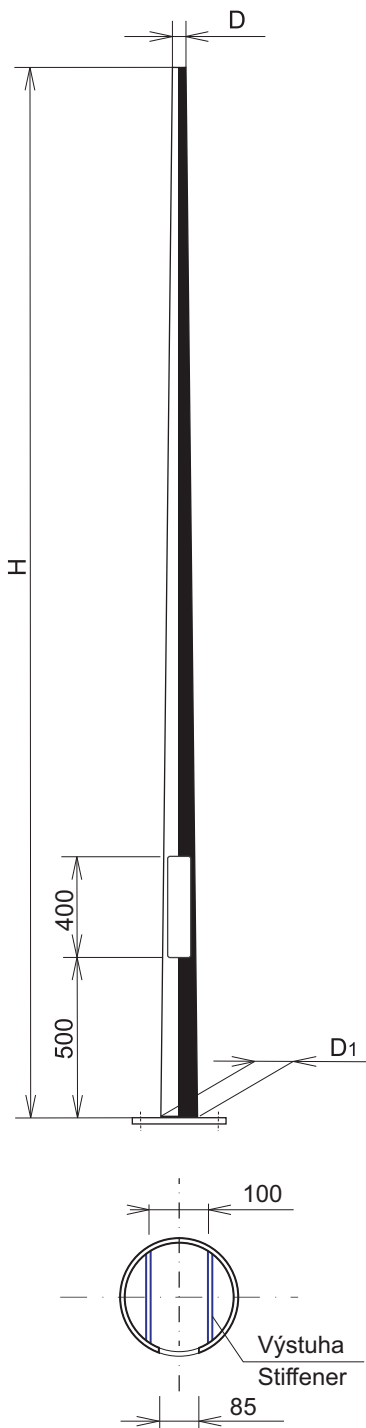

Typ/Type	Kuželovitost' /Conicity	H (m)	D (mm)	D1 (mm)	Zaťaženie na vrchole / Loading on top		M (kNm)	kg	Základový rošt / Grillage base
					**Plocha(m²)	*Hmotnosť(kg)			
STK 60/40/3PK14	K14	4	60	116	0,70	70	2,46	33	ZR-1-5
STK 60/50/3PK14	K14	5	60	130	0,75	75	3,64	41	ZR-1-5
STK 60/60/3P1	K10	6	60	120	0,40	40	2,91	47	ZR-1-5
STK 60/70/3P1	K10	7	60	130	0,35	35	3,46	58	ZR-1-5
STK 60/80/3P1	K10	8	60	140	0,75	75	7,37	69	ZR-1-5
STK 60/90/3P1	K10	9	60	150	0,73	70	8,74	79	ZR-1-5
STK 60/100/3P1	K10	10	60	160	0,69	65	10,0	91	ZR-1-5
STK 76/30/3P1K14	K14	3	76	118	1,30	110	2,91	28	ZR-1-5
STK 76/40/3P1K14	K14	4	76	132	1,20	110	4,06	37	ZR-1-5
STK 76/50/3P1K14	K14	5	76	146	1,20	110	5,59	47	ZR-1-5
STK 76/60/3P1	K10	6	76	136	0,68	65	4,54	54	ZR-1-5
STK 76/60/3P1K14	K14	6	76	160	1,10	100	6,79	62	ZR-1-5
STK 76/70/3P1	K10	7	76	146	0,58	55	5,16	65	ZR-1-5
STK 76/70/3P1K14	K14	7	76	174	0,98	95	7,81	74	ZR-1-5
STK 76/80/3P1	K10	8	76	156	0,50	50	5,84	76	ZR-1-5
STK 76/80/3P1K14	K14	8	76	188	0,89	85	8,96	86	ZR-1-5
STK 76/90/3P1	K10	9	76	166	0,42	40	6,48	87	ZR-1-5
STK 76/90/3P1K14	K14	9	76	202	0,81	80	10,2	100	ZR-1-5
STK 76/90/4P1	K10	9	76	166	0,80	80	9,79	113	ZR-1-5
STK 76/90/4P1K14	K14	9	76	202	1,44	110	15,7	129	ZR-1-5
STK 76/100/3P1	K10	10	76	176	0,90	90	12,7	102	ZR-1-5
STK 76/100/3P1K14	K14	10	76	216	0,75	75	11,6	115	ZR-1-5
STK 76/100/4P	K10	10	76	176	1,40	110	17,6	141	ZR-2-12
STK 76/100/4PK14	K14	10	76	216	1,37	110	17,8	154	ZR-2-12
STK 76/110/3P1	K10	11	76	186	0,82	80	13,9	115	ZR-1-5
STK 76/110/3P1K14	K14	11	76	230	0,70	65	13,2	129	ZR-1-5
STK 76/110/4P	K10	11	76	186	1,30	110	19,3	158	ZR-2-12
STK 76/110/4PK14	K14	11	76	230	1,30	110	19,9	174	ZR-2-12
STK 76/120/3P	K10	12	76	196	0,73	70	15,1	140	ZR-2-12
STK 76/120/3P1K14	K14	12	76	244	0,64	60	14,7	147	ZR-1-5
STK 76/120/4P	K10	12	76	196	1,20	110	21	176	ZR-2-12
STK 76/120/4PK14	K14	12	76	244	1,25	110	22,4	197	ZR-2-12
STK 89/70/3P1	K10	7	89	159	0,82	80	6,87	71	ZR-1-5
STK 89/70/3P1K14	K14	7	89	187	1,27	110	9,84	80	ZR-1-5
STK 89/80/3P1	K10	8	89	169	0,70	70	7,61	84	ZR-1-5
STK 89/80/3P1K14	K14	8	89	201	1,13	110	10,8	94	ZR-1-5
STK 89/80/4P1	K10	8	89	169	1,20	110	11,3	107	ZR-1-5
STK 89/80/4P1K14	K14	8	89	201	1,75	110	15,7	120	ZR-1-5
STK 89/90/3P1	K10	9	89	179	0,60	60	8,4	96	ZR-1-5
STK 89/90/3P1K14	K14	9	89	215	1,00	100	12,2	108	ZR-1-5
STK 89/90/4P1	K10	9	89	179	1,10	100	12,7	124	ZR-1-5
STK 89/90/4PK14	K14	9	89	215	1,63	110	17,7	145	ZR-2-12
STK 89/100/3P1	K10	10	89	189	0,52	50	9,32	109	ZR-1-5
STK 89/100/3P1K14	K14	10	89	229	0,95	90	14	124	ZR-1-5
STK 89/100/4P1	K10	10	89	189	1,00	100	14,1	141	ZR-1-5
STK 89/100/4PK14	K14	10	89	229	1,52	110	19,7	166	ZR-2-12
STK 89/110/4PK14	K10	11	89	243	1,43	110	21,9	190	ZR-2-12
STK 89/110/3P1K14	K14	11	89	243	0,87	85	15,6	140	ZR-1-5

M - max. klopny moment vo votknutí/kotvení
M - max. overturning moment at embedding/anchoring

DVIERKA : 85 x 400 ZAPUSTENÉ
DOOR: 85 x 400 INSERTED

** Zaťažujúca plocha výložníka a svietidla v m²
* Hmotnosť zaťaženia na vrchole kg