


PREKLAD B3...2ks

M 1:35

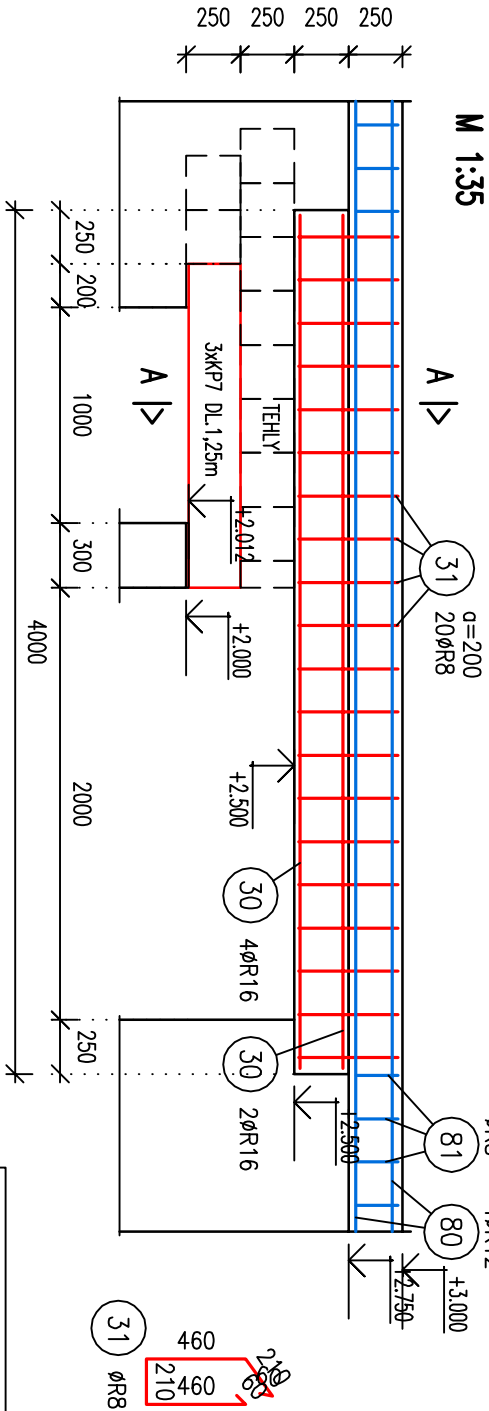


30 ØR16 DL=3950mm 6KS

VÝKAZ VÝSTUŽE						
PRVOK	POL.	Ø	DLŽKA [m]	KS	DLŽKA - bm	
					10 505	
					ØR8	ØR16
2x	30	R16	3,95	6		23,70
	31	R8	1,46	20		29,20
	CELKOM			m		29,20
				kg/m		0,395
				kg		11,53
B3				kg		48,93
	HMOTNOST CELKOM			kg		48,93
	2x48,93=					97,86


REZ A-A

M 1:35

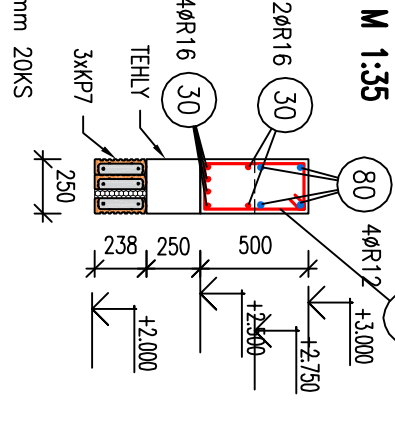[illegible]

PREKLAD B4...2ks

M 1:35

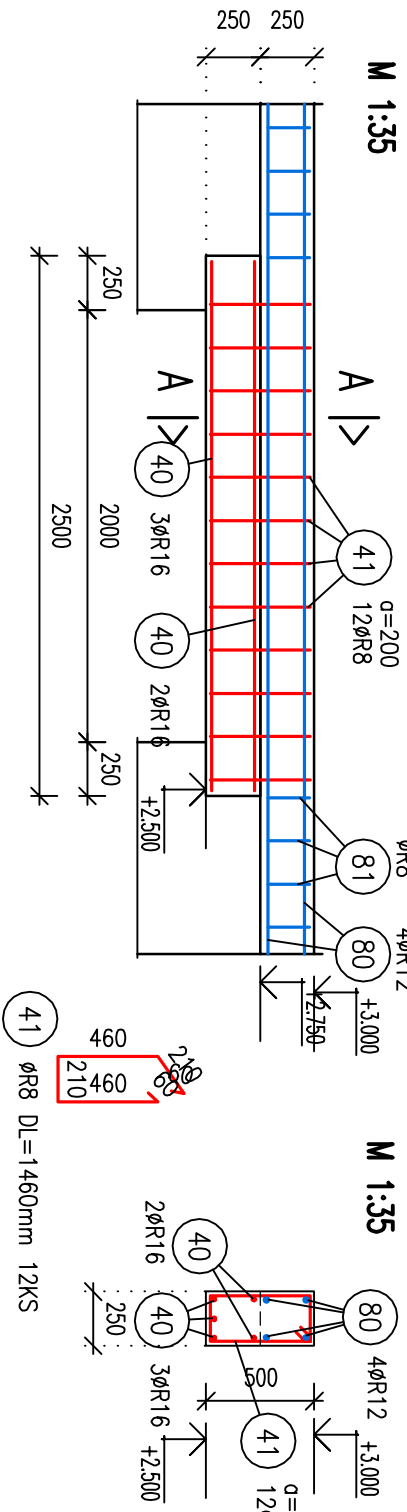


40 ØR16 DL=2450mm 5KS

VÝKAZ VÝSTUŽE						
PRVOK	POL.	Ø	DLŽKA [m]	KS	DLŽKA – bm	
					10 505	
B4	40	R16	2,45	5	ØR8	ØR16
	41	R8	1,46	12		12,25
	CELKOM					
			m	17,52	12,25	
2x					kg/m	0,395
					kg	6,92
					kg	19,33
					kg	26,25
	HMOTNOST CELKOM			kg		26,25
					2x26,25=	52,50


REZ A-A

M 1:35

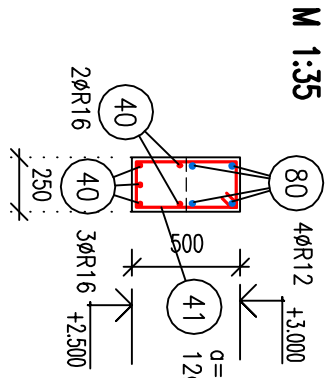

PREKLAD B5...1ks

M 1:35

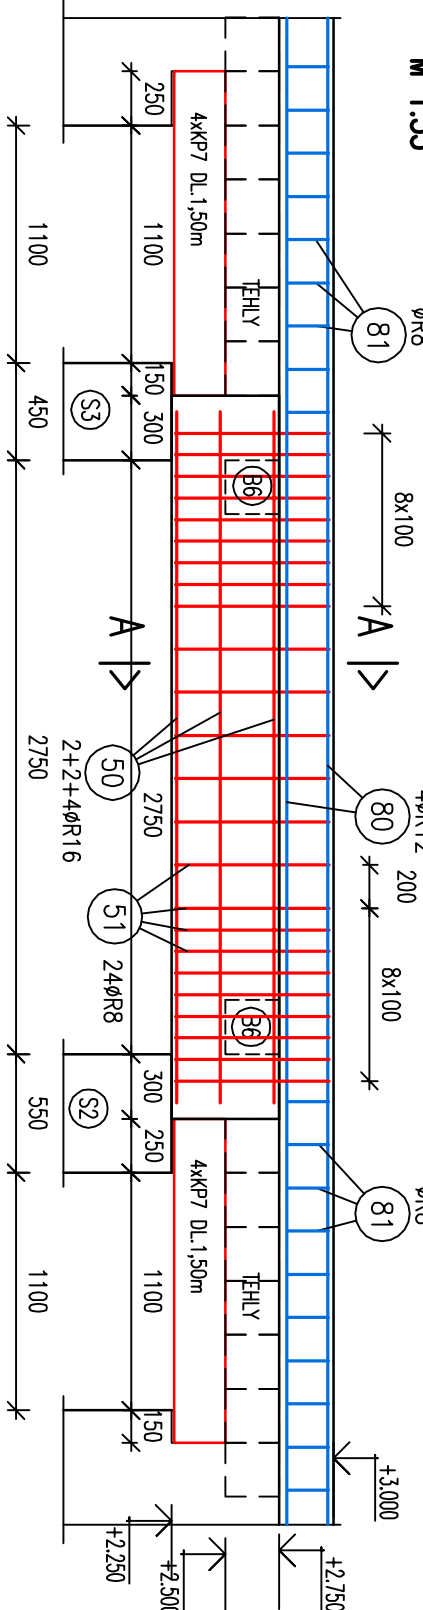


50) ØR16 DL=3200mm 8KS

VÝKAZ VÝSTUŽE						
PRVOK	POL.	Ø	DLŽKA [m]	KS	DLŽKA - bm	
					10 505	
					ØR8	ØR16
B5	50	R16	3,20	8		25,60
	51	R8	2,06	24		49,44
	CELKOM			m	49,44	25,60
				kg/m	0,395	1,578
				kg	19,53	40,40
1x				kg	59,93	
	HMOTNOST CELKOM			kg	59,93	
					1x59,93=	59,93


REL A-A

CC:1 M

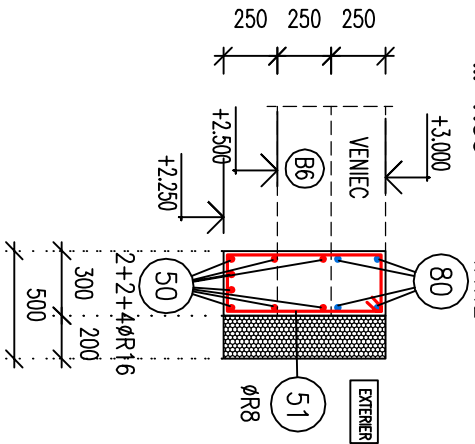

PREKLAD B4...2ks

M 1:35

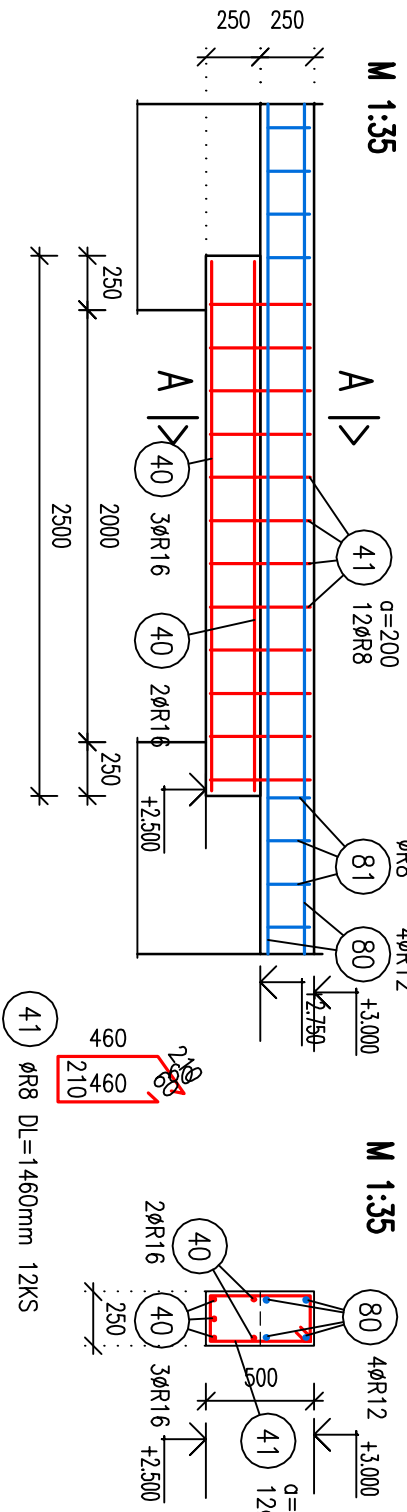


40 ØR16 DL=2450mm 5KS

VÝKAZ VÝSTUŽE						
PRVOK	POL.	Ø	DLŽKA [m]	KS	DLŽKA – bm	
					10 505	
B4	40	R16	2,45	5	ØR8	ØR16
	41	R8	1,46	12		12,25
	CELKOM					
			m	17,52	12,25	
2x					kg/m	0,395
					kg	6,92
					kg	19,33
					kg	26,25
	HMOTNOST CELKOM			kg		26,25
					2x26,25=	52,50

REZ A-A

M 1:35

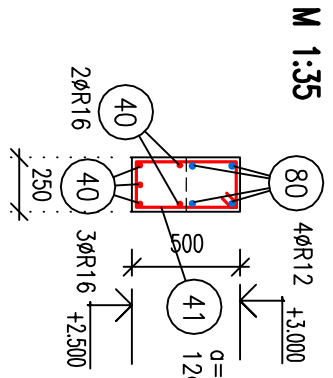

STRMENE KOTOVANÉ NA VONKAJŠÍ OKRAJ :

MATERIALY:

BETÓN: C25/30-XC1-Cl 0,4-D_{max}=16mm

OCEL: B500E

KRYLIE NA SIRMENE: 20mm

[illegible]