

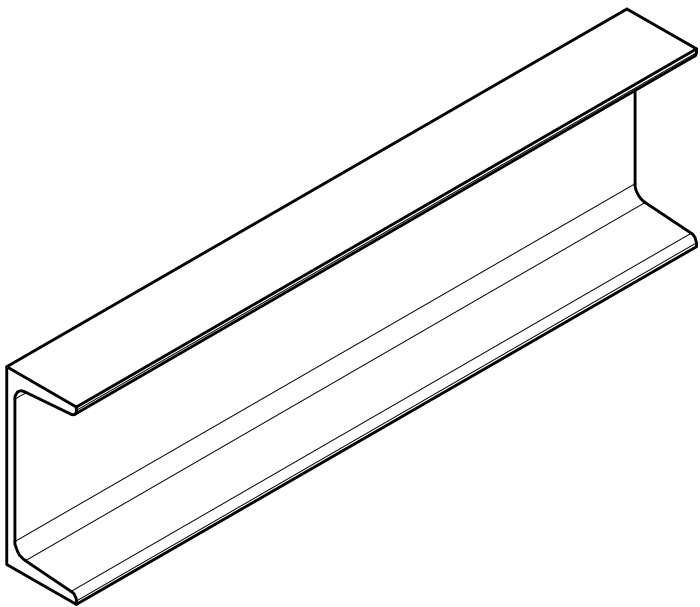


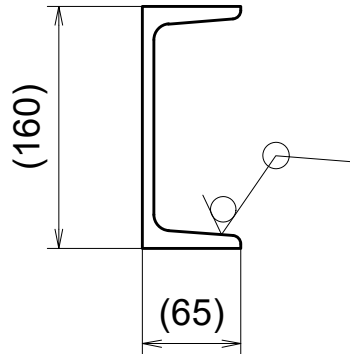

|  |              |                                       |             |   |  |   |  |   |  |   |  |   |  |   |  |
|--|--------------|---------------------------------------|-------------|---|--|---|--|---|--|---|--|---|--|---|--|
| 1                                      |              | 2                                     |             | 3 |  | 4 |  | 5 |  | 6 |  | 7 |  | 8 |  |
| Netolerované rozměry délek ISO 2768-mK |              | Netolerované rozměry úhlů ISO 2768-mK |             |   |  |   |  |   |  |   |  |   |  |   |  |
| Rozsah [mm]                            | Úchylky [mm] | Délka odvěsny [mm]                    | Úchylky [°] |   |  |   |  |   |  |   |  |   |  |   |  |
| od 2000 do 4000                        | ±2           | přes 400                              | ±0°5'       |   |  |   |  |   |  |   |  |   |  |   |  |
| od 1000 do 2000                        | ±1,2         | od 120 do 400                         | ±0°10'      |   |  |   |  |   |  |   |  |   |  |   |  |
| od 400 do 1000                         | ±0,8         | od 50 do 120                          | ±0°20'      |   |  |   |  |   |  |   |  |   |  |   |  |
| od 120 do 400                          | ±0,5         | od 10 do 50                           | ±0°30'      |   |  |   |  |   |  |   |  |   |  |   |  |
| od 30 do 120                           | ±0,3         | do 10                                 | ±1°         |   |  |   |  |   |  |   |  |   |  |   |  |
| od 6 do 30                             | ±0,2         |                                       |             |   |  |   |  |   |  |   |  |   |  |   |  |
| od 0,5 do 6                            | ±0,1         |                                       |             |   |  |   |  |   |  |   |  |   |  |   |  |

Ra 6,3

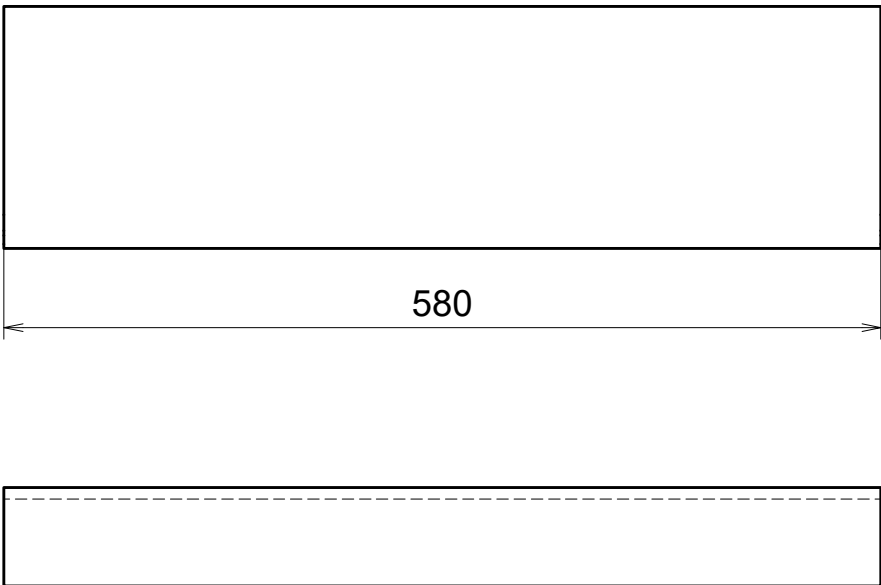

# PŘEDBĚŽNÉ ODJEHLIT

|  |  |   |  |  |  |
|--|--|---|--|--|--|
| Polotovár:<br>Semi-finished: OCP00011013   |  | Norma:<br>Standard: DIN 1026-1  |  | Rozměr:<br>Dimension: U 160  |  |
| Materiál:<br>Material: S235JR (1.0038)   |  | Povrchová úprava:<br>Surface treatment:   |  |  |  |
| Hmotnost (kg):<br>Mass (kg): 10,9  |  | Název:<br>Title:  |  |  |  |
| Štěpánská 34<br>110 00 Praha 1 <a href="http://www.ice.cz">www.ice.cz</a><br>Tato technická dokumentace je duševním vlastnictvím firmy<br>ICE Industrial Services a.s.. Bez souhlasu vlastníka nesmí<br>být kopírována, publikována ani poskytnuta třetí osobě.<br>This technical documentation is the intellectual property of the company<br>ICE Industrial Services a.s.. Copying, publishing or disclosure to third<br>parties without the expressed permission of the owner is forbidden. |  |  |  | PROFIL - U   |  |
| Navrhl:<br>Designed: Dalibor Kunc<br>Datum:<br>Date: 02.10.2025  |  | Číslo výkresu:<br>Drawing No.: TaO-00097  |  | Revize:<br>Revision: 00  |  |
| Schválil:<br>Approved:<br>Datum:<br>Date:  |  |  |  | Přesnost:<br>Precision: ISO 2768 - mK<br>Tolerance:<br>Tolerance: ISO 8015 |  |
|  |  |   |  | Měřítko:<br>Scale: 1 : 5<br>List:<br>Sh.: 1 / 1<br>Formát:<br>Format: A3   |  |

|   |   |      |                     |  |                     |              |                 |   |  |   |                     |  |             |            |
|---|---|------|---------------------|--|---------------------|--------------|-----------------|---|--|---|---------------------|--|-------------|------------|
|   |   | REV. | POPIS / DESCRIPTION |  | SCHVALIL / APPROVED | DATUM / DATE | Datum:<br>Date: |   | <div><div></div><div></div><div></div></div> | ✓ | Tolerance: ISO 8015 |  | List: 1 / 1 | Format: A3 |
| 1 | 2 |      | 3                   |  | 4                   | 5            | 6               | 7 | 8  |   |                     |  |             |            |