



OKRAJ STROPU

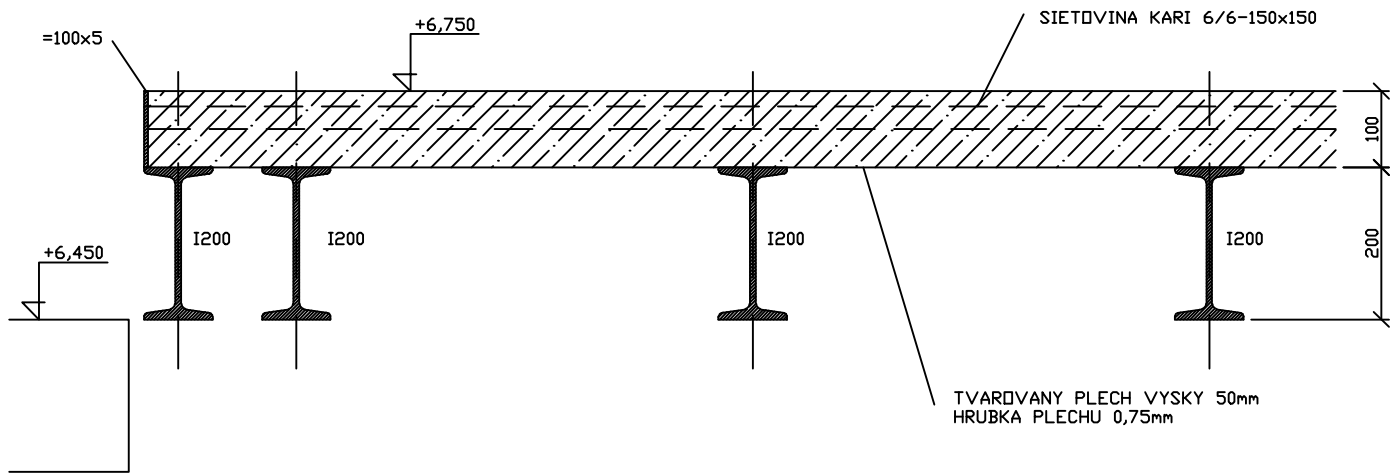

ULOZENIE STROPNYCH NOSNIKOV NA BET. PRIEVLAK

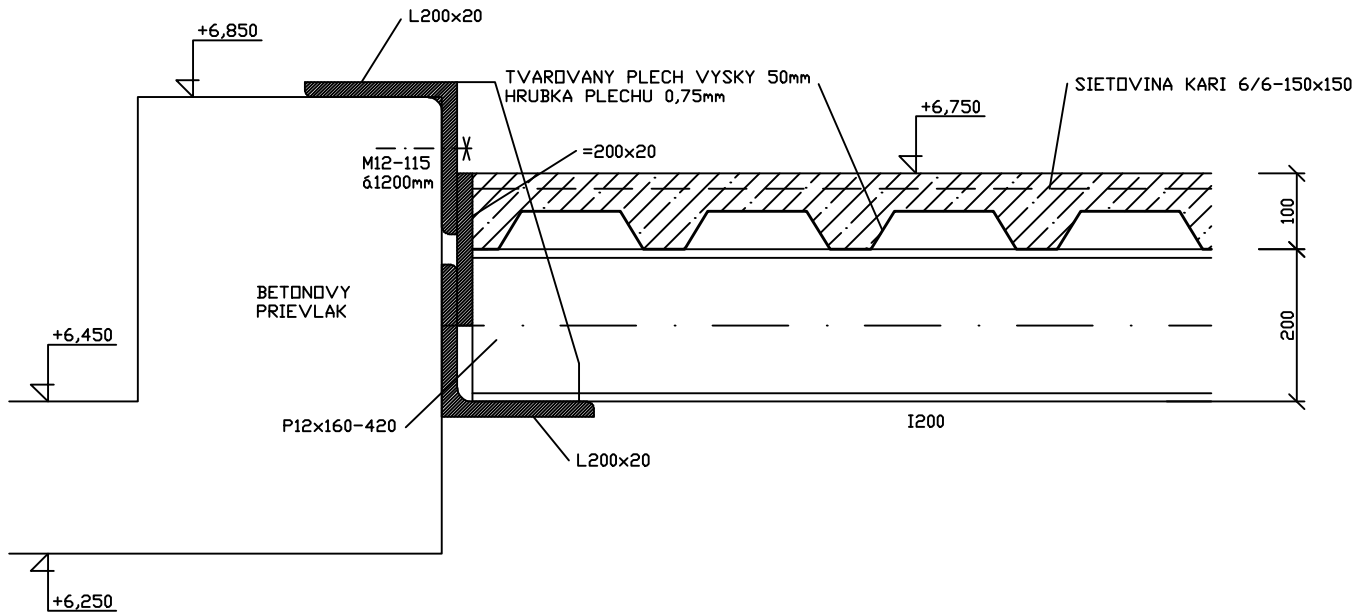

KOTVY DO BETONU: M12-115mm, KS=40

OBA UHOLNIKY VZAJOMNE ZVARIT S PASOVINU NOSNYM ZVARDOM HR. 14mm.
VYSTUHY PRIVARIT ZVARDOM HR. 6mm

OCEL: S235, NATER: ZAKLADNY+VRCHNY

DETAILY m1:10