

Pohľad P1 - VÝCHODNÝ



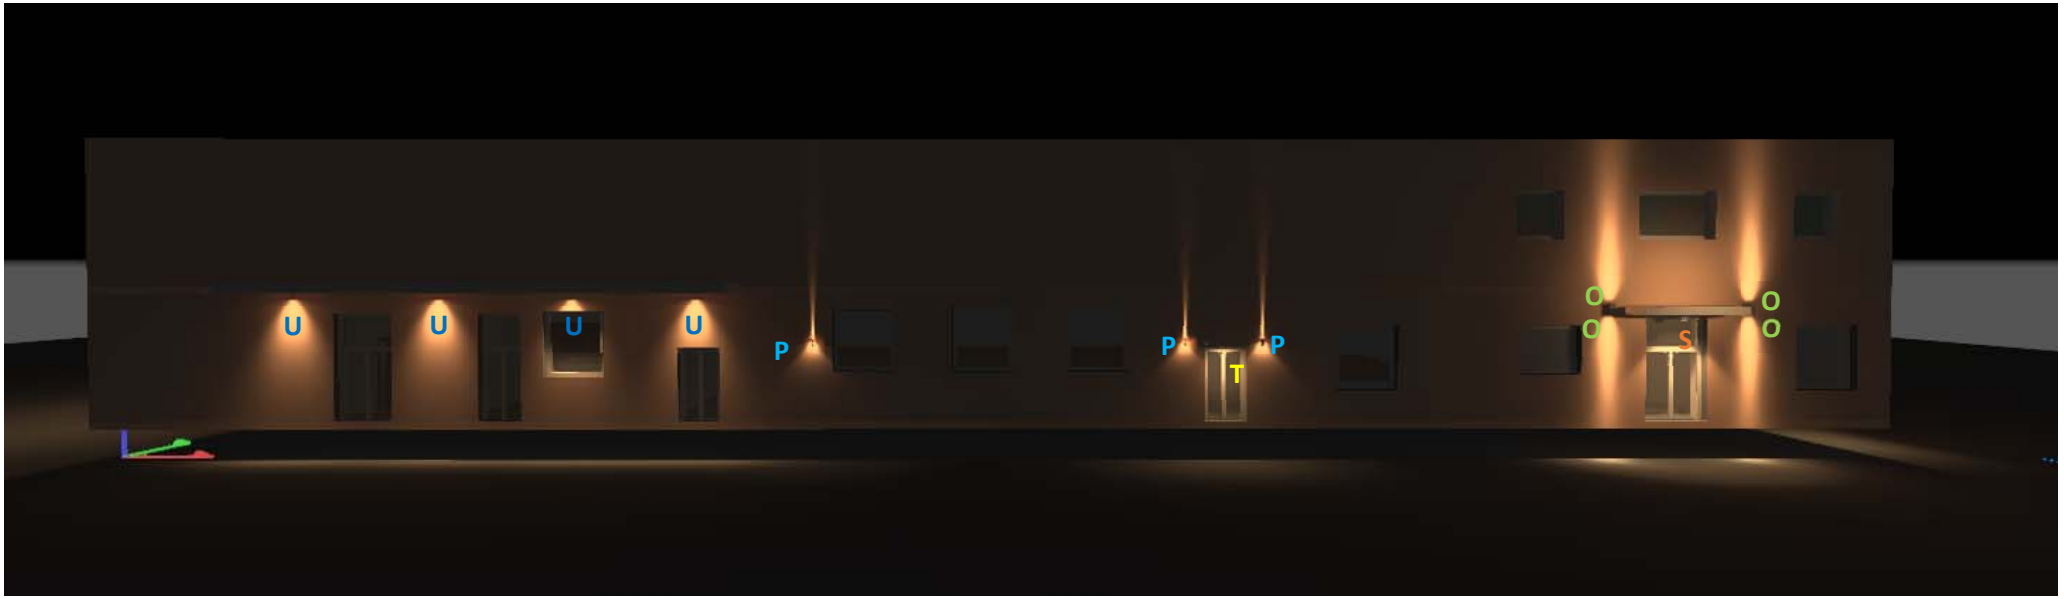

Pohľad P4 - SEVERNÝ

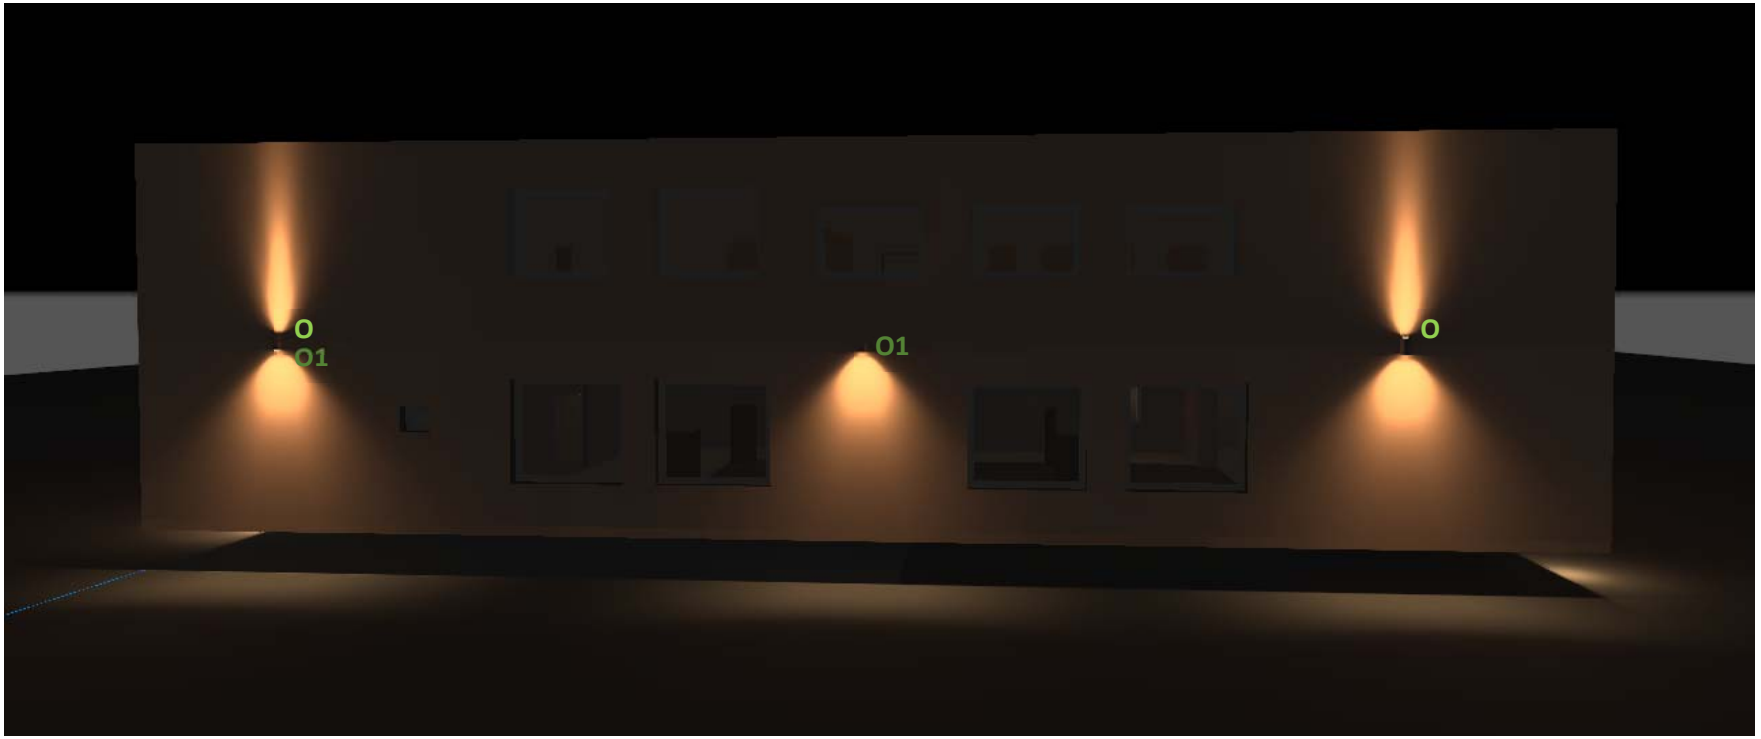

Pohľad P3 - ZÁPADNÝ



Pohľad P2 - JUŽNÝ





iPro / ▫ 132mm

EP49 + nástenný úchyt









Product Information

- LED
- 9.4W 1050lm - light source value
- 11.1W 746lm - system values
- Luminous Efficiency (system value): 67lm/W
- 3000K CRI 80
- Electronic Control gear included
- Control: On/off
- Optic: S - Spot 12° / 13°
- Adjustability: directional
- Material: Aluminium
- Size (mm): 132x132x140, Weight (kg): 2.80
- Environment: Outdoor
- Design: Mario Cucinella

01 White

15 Grey



Technical Specifications

IK07 IP66 960°C



BZI8
Applique clip


iPro / □ 132mm


EP53 + refraktor + nástenný úchyt BZI8

01









Product Information

- LED
- 12W 1750lm - light source value
- 13.9W 1418lm - system values
- Luminous Efficiency (system value): 101lm/W
- 3000K CRI 80
- Electronic Control gear included
- Control: On/off
- Optic: WF - Wide Flood 44°
- Adjustability: directional
- Material: Aluminium
- Size (mm): 132x132x140, Weight (kg): 2.80
- Environment: Outdoor
- Design: Mario Cucinella

01 White

15 Grey






Technical Specifications

IK07 IP66 960°C





BZ53
Refractor for elliptical distribution





BZI8
Applique clip

BK13 bez svorkovnice – potrebné montážne príslušenstvo pod omietku P









Product Information

- LED
- 4.3W 600lm - light source value
- 6W 156lm - system values
- Luminous Efficiency (system value): 26lm/W
- 3000K CRI 80
- Electronic Control gear included
- Optic: Light blade / Very Wide Flood
- Adjustability: fixed
- Material: Aluminium
- Size (mm): 51x51x161, Weight (kg): 0.56
- Environment: Outdoor
- Design: Mario Cucinella
- This product requires the accessories listed below to be installed:
  - 2-way junction connector - IP68 X188
  - 4-way junction connector - IP68 X189

01 White

15 Grey



Technical Specifications

IK07 IP66 960°C



X188
2-way junction connector - IP68
Size (mm): ø23



X189
4-way junction connector - IP68
Size (mm): 80x54x28


iPro / □ 192mm


EQ04 + nástenný úchyt BZM5

R









Product Information

- LED
- 29W 3750lm - light source value
- 33.2W 3188lm - system values
- Luminous Efficiency (system value): 96lm/W
- 3000K CRI 80
- Dimmable Electronic Control gear included
- Control: DALI
- Optic: A60 - Asymmetric h = 7 / d = 2
- Adjustability: directional
- Material: Aluminium
- Size (mm): 192x192x200, Weight (kg): 6.30
- Environment: Outdoor
- Design: Mario Cucinella



BZM5
Applique clip

01 White

15 Grey

Technical Specifications

IK07 IP66 960°C


iPro / □ 132mm ceiling mounted


EQ10

S









Product Information

- LED
- 12W 1750lm - light source value
- 13.9W 1330lm - system values
- Luminous Efficiency (system value): 95lm/W
- 3000K CRI 80
- Electronic Control gear included
- Optic: VWF - Very Wide Flood 81° / 80°
- Adjustability: fixed
- Material: Aluminium
- Size (mm): 132x132x165, Weight (kg): 3.20
- Environment: Outdoor
- Design: Mario Cucinella

01 White

15 Grey

Technical Specifications


IK07 IP66 960°C


iPro / □ 81mm

BK27 Možná stropná aj nástenná montáž – vždy s konzolou









Product Information

- LED
- 6.2W 810lm - light source value
- 7.7W 437lm - system values
- Luminous Efficiency (system value): 56lm/W
- 3000K CRI 80
- Electronic Control gear included
- Optic: VWF - Very Wide Flood 78°
- Adjustability: directional
- Material: Aluminium
- Size (mm): 81x81x86, Weight (kg): 0.86
- Environment: Outdoor
- Design: Mario Cucinella

01 White

15 Grey



Technical Specifications

IK07 IP66

iPro / □ 81mm


BK23


- možná stropná aj nástenná montáž – vždy s konzolou
- pozdĺžna eliptická optika EL

U









Product Information

- LED
- 6.2W 810lm - light source value
- 7.7W 551lm - system values
- Luminous Efficiency (system value): 71lm/W
- 3000K CRI 80
- Electronic Control gear included
- Optic: Ellittica Longitudinale
- Adjustability: directional
- Material: Aluminium
- Size (mm): 81x81x86, Weight (kg): 0.86
- Environment: Outdoor
- Design: Mario Cucinella

01 White

15 Grey



Technical Specifications

IK07 IP66


iPro / □ 155mm


EP57 - montáž na stĺp verejného osvetlenia
- osvetlenie vlajok a nápisu Obecný úrad SEDLICE

V









Product Information

- LED
- 9.3W 1000lm - light source value
- 11.2W 550lm - system values
- Luminous Efficiency (system value): 49lm/W
- 3000K CRI 80
- Dimmable Electronic Control gear included
- Control: DALI
- Optic: SS - SuperSpot 8°
- Adjustability: directional
- Material: Aluminium
- Size (mm): 155x155x165, Weight (kg): 3.90
- Environment: Outdoor
- Design: Mario Cucinella

01 White

15 Grey

Technical Specifications

IK07 IP66 960°C