


PRODUCT DETAILS

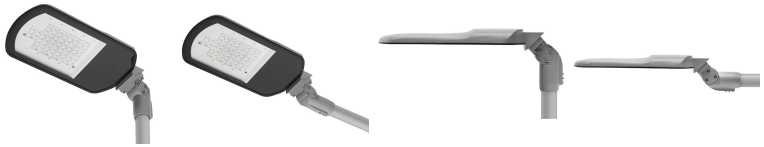

UPCOMING NEW FASTRUNNER UPDATED STOP DATE

220-240V 50-60Hz | CCT 4500 K | CRI 70+ Ra | ECG | ECG 100%→50% | ECG DALI | ECG 1-10V | IK 08 | IP 67 | LED

Accessories

DOWNLOADS

Certificates
Datasheet
Installation manual

MEGIN M

Description

MOUNTING	Pole top / side entry installation (PMT)
LIGHT SOURCE	LED
OPTICAL SYSTEM	Lenses (LNS)
LIGHT DISTRIBUTION	Direct
WIRING	Electronic control gear FIX / DALI / STEP DIM / INT DIM (ECG / EDA / EDB / EDP)
MATERIALS	Cover: PC Frame: sheet steel Housing: die-cast aluminium Tiltable spigot: die cast aluminium
SURFACE FINISH	Housing: grey RAL 9006 (G06)
ACCESSORIES	External lead-in flexible cable
SERVICE LIFETIME (Ta=25°C)	Up to 100,000 hours / L80
AMBIENT OPERATING TEMPERATURE	From -35 °C to +40 °C

AREAS OF APPLICATION STREET AND URBAN

5 YEARS WARRANTY | EEC A++/A+/F | HEAT SINK | MAINTENANCE FREE | UV/IR | ECO FRIENDLY | ENERGY SAVING

List of products

PRODUCT NAME	STATUS	QUICK DOWNLOADS
MEGIN M (L01) LED 2950lm/745 1x26W, LED DRIVER, -		RFA / 3DS / IES / LDT / CURVE /
MEGIN M (L01) LED 3950lm/745 1x35W, LED DRIVER, -		RFA / 3DS / IES / LDT / CURVE /
MEGIN M (L01) LED 4950lm/745 1x44W, LED DRIVER, -		RFA / 3DS / IES / LDT / CURVE /
MEGIN M (L01) LED 6900lm/745 1x62W, LED DRIVER, -		RFA / 3DS / IES / LDT / CURVE /
MEGIN M (L01) LED 10850lm/745 1x97W, LED DRIVER, -		RFA / 3DS / IES / LDT / CURVE /
MEGIN M (L01) LED 12800lm/745 1x115W, LED DRIVER, -		RFA / 3DS / IES / LDT / CURVE /
MEGIN M (L01) LED 8900lm/745 1x80W, LED DRIVER, -		RFA / 3DS / IES / LDT / CURVE /

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.