
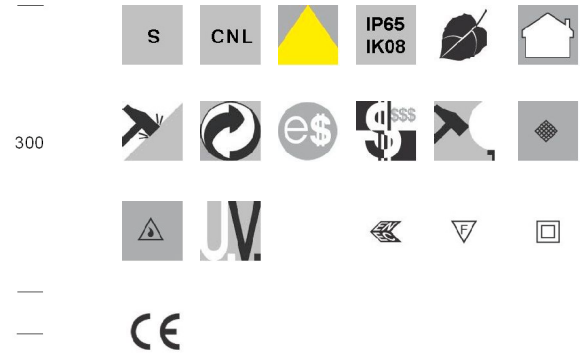


1544 Globo

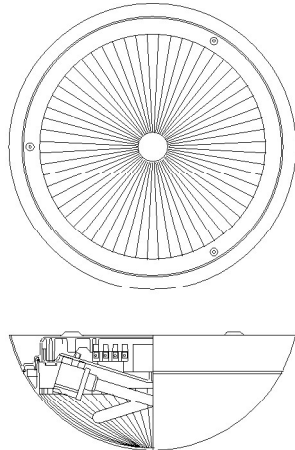

Code	px no. pack.	Gear	Kg	Watt	Base	Colour	Dimensions	Total Installed Power Capacity	Lamp
427246-00	1	S	1.40	INC 100	E27	grey	0x0x124 R300		270
427247-00	1	CNL	1.70	FLC 2x9S	G23	grey	0x0x124 R300	28	400

Housing: In vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized.

Diffuser: In anti-glare, vandal resistant and V2 self-extinguishing polycarbonate, UV stabilized, smooth outside, dustproof.

Reflector: In polished aluminium and white polycarbonate.

Lampholder: In polycarbonate, phosphor bronze contacts. Socket G23; E27.

Electric gear: 230V/50Hz power supply. Hard wire 0.75 sqmm cross-section and PVC-HT sheath resistant up to 90°C according to CEI 20-20 standards or hard silicone wire with glass braid, 0.75 sqmm cross-section. 2P or 2P+T terminal block with maximum allowed lead cross-section of 2.5 sqmm.

Equipment: Gasket in environment-friendly material. Cable gland in fiber glass nylon R 1/2 gas thread (cable min. R 9 max. R 12).

Regulations: Produced according to applicable IEC 598 - CEI 34 - 21 standards, IP65 degree of protection according to EN 60529 standards. Double insulation.

Lamp: Complete with lamp. INC100; FLC2x9s.