


1725 Sicura recessed - asymmetric

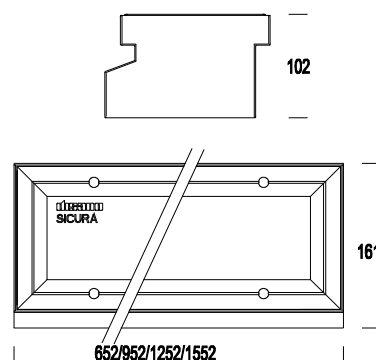

Code	Gear	Kg	Colour	Dimensions	Total Installed Power Capacity	lamp
414320-00	CELL	3.40	graphite	652x161x102	26	FL 1x20 ECO-G5-1650lm-4000K-Ra 1b
414321-00	CELL	4.50	graphite	952x161x102	43	FL 1x37 ECO-G5-3100lm-4000K-Ra 1b
414322-00	CELL	7.00	graphite	1552x161x102	55	FL 1x45 ECO-G5-4100lm-4000K-Ra 1b
414323-00	CELL	7.00	graphite	1252x161x102	60	FL 1x50 ECO-G5-4450lm-4000K-Ra 1b

HOUSING: Supplied with a extrude aluminium frame with die-cast aluminium end caps.

REFLECTOR: Asymmetric made of high-gloss anodised 99.85 aluminium.

DIFFUSER: 5mm thick thermal shock and impact resistant tempered glass.

LAMPHOLDER: Polycarbonate with phosphorous bronze contacts.

ELECTRIC GEAR: 230-240 V / 50-60 Hz power supply with electronic ballast; hard wire, cross-section 0.50sqmm, 90°C heat resistant PVC-HT sheath in accordance with CEI 20-20 standards. 2P terminal block (maximum allowed lead cross-section: 2,5 sqmm).

COATING: Graphite grey polyester powder coating applied, resistant to corrosive and saline environments.

EQUIPMENT: Fibreglass nylon cable gland, Ø ½ " gas.

REGULATIONS: Manufactured in compliance with EN60598 - CEI 34 - 21 standards. The level of protection complies with the EN60529 standard.