
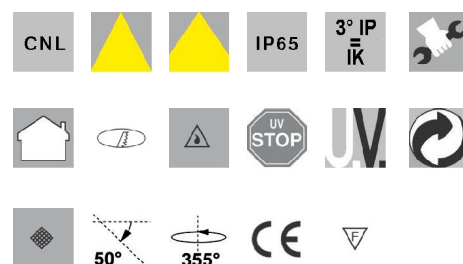


## King

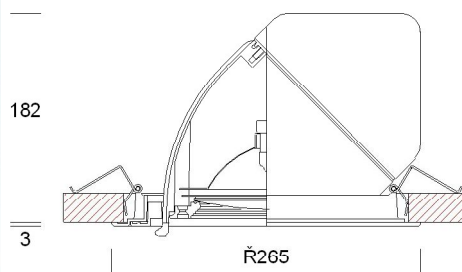

Code	Gear	Base	Volt	Watt	Lamp	Reflector	Kg	Colour	Dimensions	Lamps	Total Installation
85111	CTL	GY6,35	12	50	ALO	S	4.2	white	0x0x185	3000k - 930lm - 100	
85179	CTL	GY6,35	12	50	ALO	S	4.2	met. silver	0x0x185	3000k - 930lm - 100	
85212	CNL	E27	230	75	ALO	M	3.6	white	0x0x185	3000k - 1100lm - 100	
85278	CNL	E27	230	75	ALO	M	3.6	met. silver	0x0x185	3000k - 1100lm - 100	
85414	CNRL	G24d-1	230	13	FLC-D	L	3.8	white	0x0x185	3000k - 900lm - 1B	
85476	CNRL	G24d-1	230	13	FLC-D	L	3.8	met. silver	0x0x185	3000k - 900lm - 1B	

King is a recessed floodlight designed to provide a solution to the lighting of environments requiring a high degree of protection.

Housing: Adjustable-angle, made of die-cast aluminium.

Reflector: High-performance oxidised and polished aluminium.

Diffuser: Tempered glass protection shield.

Coating: Humidity-resistant acrylic-resin liquid paint, UV-stabilised.

Lampholder: Ceramic with silver-plated contacts, or polycarbonate with phosphor bronze contacts.

Electric gear: 230V/50Hz power supply. Flexible silicone insulated wire terminated with admiralty brass clamps, with fibreglass braid, cross-section: 1.5 sqmm. 2P+T terminal block (with plug-socket connector).

Standard supply: Includes adjustable steel bracket. Hinge opening of the glass holding ring for easier maintenance.

Regulations: Manufactured in accordance with standards EN60598 – CEI 34 –21. Degree of protection in accordance with standards EN60529.

Lamps: halogen, compact fluorescent energy-saving lamps included.