




Operator
Telephone
Fax
e-Mail

Room 1 / Single Sheet Output

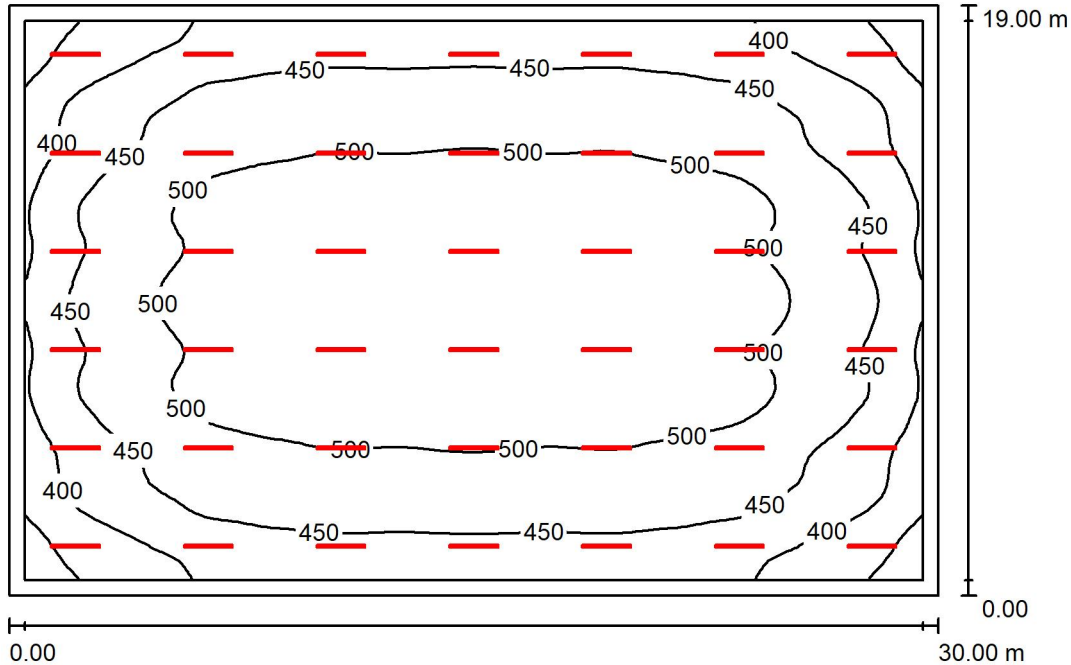

Height of Room: 6.100 m, Mounting Height: 6.100 m, Maintenance factor: 0.80

Values in Lux, Scale 1:244

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	471	320	546	0.679
Floor	20	441	273	524	0.618
Ceiling	70	152	105	948	0.692
Walls (4)	50	313	172	558	/

Workplane:

Height: 0.750 m
Grid: 64 x 64 Points
Boundary Zone: 0.500 m

UGR

Left Wall
Lower Wall
(CIE, SHR = 1.00.)

Lengthways-
Across
to luminaire axis

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.677, Ceiling / Working Plane: 0.323.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	42	OMS, a.s Jan19 TDO V L 69W 9600lm 80Ra 4000K (1.000)	9600	9600	69.0
			Total: 403188	Total: 403200	2898.0

Specific connected load: $5.08 \text{ W/m}^2 = 1.08 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 570.00 m^2)