
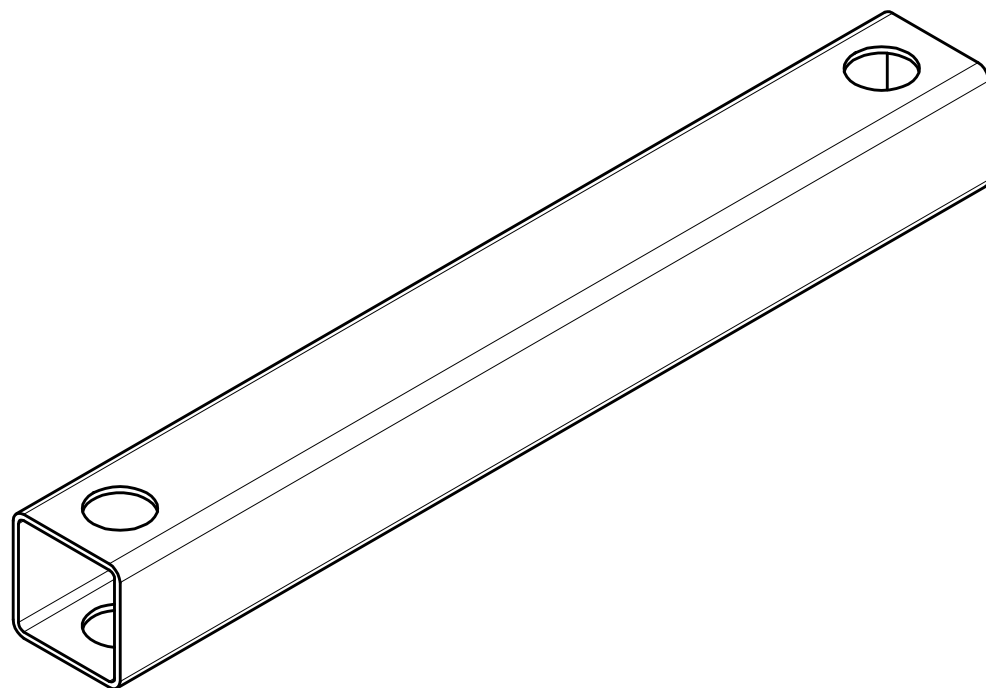
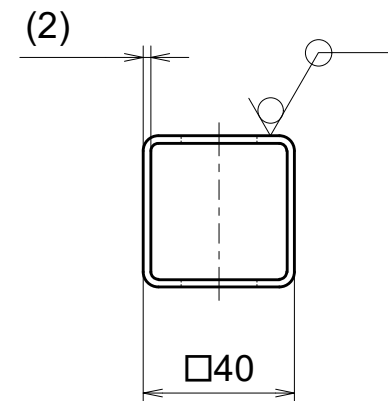


<b>1</b>		<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>
Netolerované rozměry délek ISO 2768-mK		Netolerované rozměry úhlů ISO 2768-mK						
Rozsah [mm]	Úchytky [mm]	Délka odvěсны [mm]	Úchytky [°]					
od 2000 do 4000	±2	přes 400	±0°5'					
od 1000 do 2000	±1,2	od 120 do 400	±0°10'					
od 400 do 1000	±0,8	od 50 do 120	±0°20'					
od 120 do 400	±0,5	od 10 do 50	±0°30'					
od 30 do 120	±0,3	do 10	±1°					
od 6 do 30	±0,2							
od 0,5 do 6	±0,1							

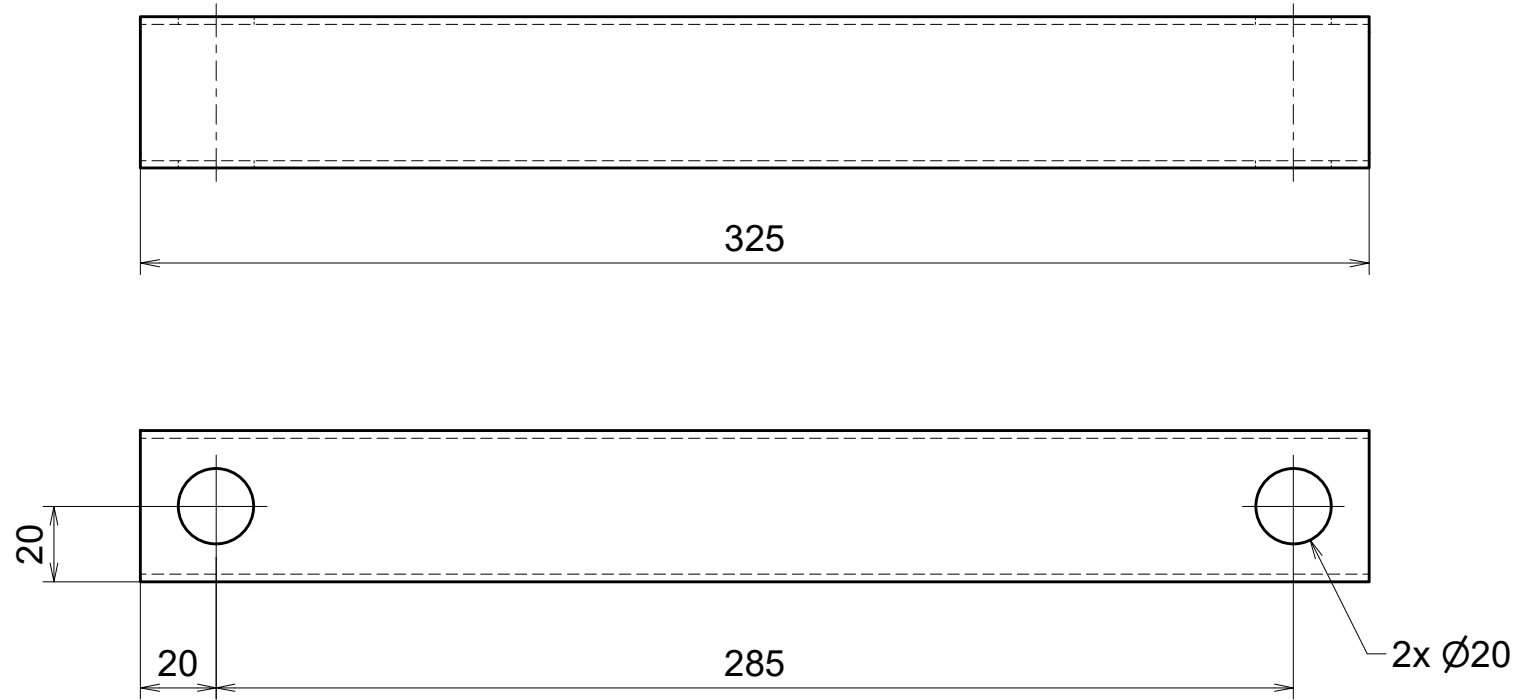

## ODJEHLIT

Potovar: Semi-finished:		OCP00000292	Norma: Standard:		ČSN EN 10219-2	Rozměř: Dimension:		40 x 40 x 2			
Materiál: Material:		1.4301	Povrchová úprava: Surface treatment:								
Hmotnost (kg): Mass (kg):		0,72	Název: Title:								
Štěpánská 34 110 00 Praha 1		www.ice.cz	<div></div> <div>PROFIL 4HR</div>								
Tato technická dokumentace je duševním vlastnictvím firmy ICE Industrial Services a.s.. Bez souhlasu vlastníka nesmí být kopírována, publikována ani poskytnuta třetí osobě.  This technical documentation is the intellectual property of the company ICE Industrial Services a.s.. Copying, publishing or disclosure to third parties without the expressed permission of the owner is forbidden.		Číslo výkresu: Drawing No.:							Revize: Revision:		
Navrhl: Designed:		Dalibor Kunc	TaO-00008							00	
Datum: Date:		22.09.2025	 Ra		Přesnost: Precision:		ISO 2768 - mK	Měřtko: Scale:		1 : 2	
Schválil: Approved:					Tolerance: Tolerance:		ISO 8015	List: Sh.:	1 / 1	Formát: Format:	A3
Datum: Date:											

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---